


Cement Resistor With Thermal Cut-offs-SMT

水泥型繞線溫度保險絲 SMT

外形尺寸

型號	外形尺寸 (mm)						
	W ± 1	D ± 1	H ± 1.5	RM+2/-1	h	D1 (R 引出端)	D2 (F 引出端)
SMT-5W	13	9	25	5	4.5±1	0.8±0.1	2A:0.6 ±0.1 10A:1.0 ±0.1
SMT-7W	13	9	38	5			
SMT-10W	16	12	35	7.5			

Power Derating Curve

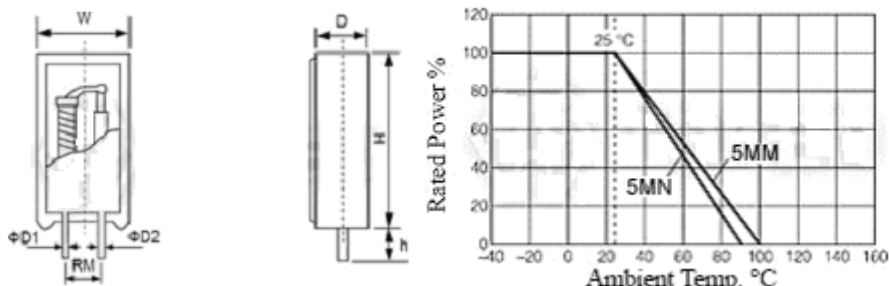


電氣特性

溫度保險絲				額定功率 at 25°C (W)			阻值範圍 (Ω)	阻值公差 (%)
標識	動作溫度 (°C)	額定電流 (A)	額定電壓 (V)	5M	7M	10M	SMT	SMT
A	109+1/-3	10	250	1.2	1.4	2.0	1~100	J(±5) K(±10)
B	129±4			1.6	2.0	2.5		
C	152±4			1.6	2.0	2.5		
D	188+3/-1			2.0	2.4	3.5		
E	226+1/-3			2.0	2.4	3.5		
F	95+3/-0	2		0.8	1.2			
G	110±4			1.2	1.4			
H	126±4			1.4	1.6			
N	130±4			1.6	2.0			
M	145±4			2.1	2.4			

I PART NUMBER:

SMT - 5W - Thermal VALUE - F

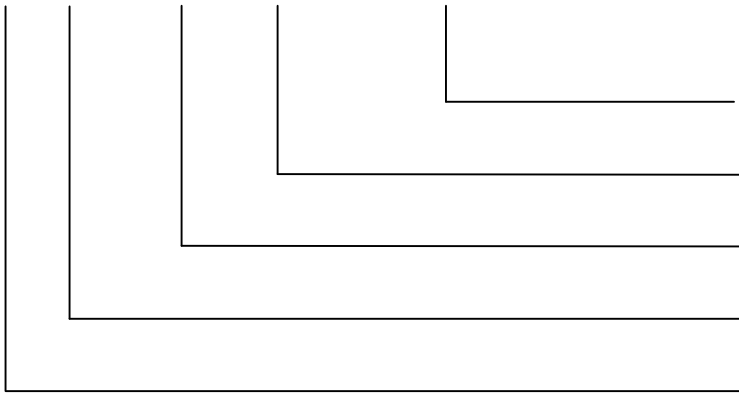

RES. TOLERANCE 5% / 1% = J / K

RESISTANCE 0R1 1R 10R 100R 1K 10K 100K 1M 10M

Thermal

DIN SIZE , BODY SIZE

Cement Resistor with Thermal Cut-offs