


Shielded SMD Power Inductor—SCDB

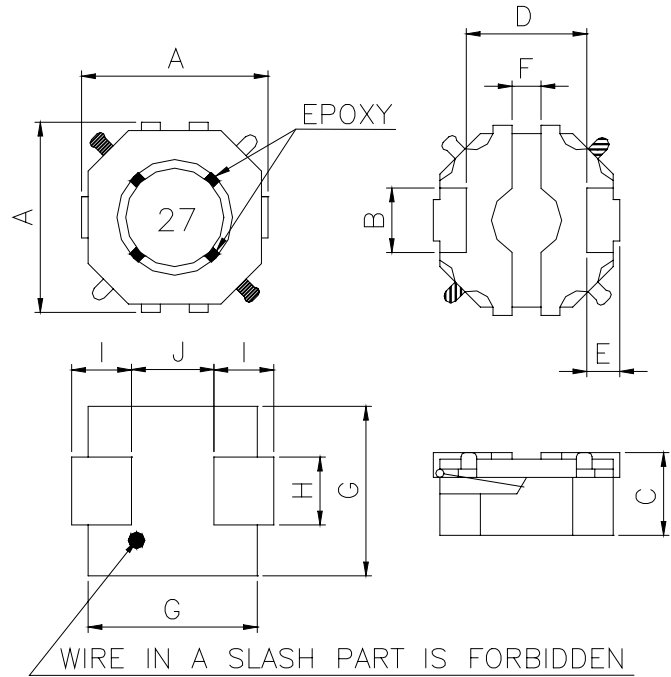

Features

- New designed terminal for low cost
- Low profile and high current
- Magnetically shielded construction
- Ideal for digital equipment and hand phone of new generation.

Applications

- DSD, DVC, PDA Products
- Hand Phone Of New Generation
- Hard Disk Drives

Characteristics

- Saturation Rated Current: The current when the inductance becomes 30% lower than its initial value. (Ta=20°C)
- Temperature Rise Current: The current when temperature of coil increases up to Max. Δt=40°C. (Ta=20°C)
- Operating temperature range: -40~85°C

Dimensions

Unit: mm

Type	A	B	C max.	D	E	F	G	H	I	J
SCDB2D12	3.0±0.2	1.0	1.2	2.0	0.5	0.5	3.2	1.2	1.1	1.8
SCDB2D15	3.0±0.2	1.0	1.5	2.0	0.5	0.5	3.2	1.2	1.1	1.8
SCDB2D18	3.0±0.2	1.0	1.8	2.0	0.5	0.5	3.2	1.2	1.1	1.8

Inductance and rated current ranges

- SCDB2D12 1.2~22μH 0.85~0.22A
- SCDB2D15 2.2~33μH 1.00~0.25A
- SCDB2D18 2.2~47μH 1.10~0.23A
- Electrical specifications at 25°C

Product Identification

SCDB	2D12	M	T	101
Product Type	Dimensions (AxBxC)	Inductor Tolerance	Packaging Style	Inductance
	2D12: 3x3x1.2 2D15: 3x3x1.5 2D18: 3x3x1.8	M: ±20% N: ±30%	T: Tape and Reel	1R1: 1.1μH 470: 47μH 101: 100μH

■ Electrical Characteristics

SCDB2D12 Type

Codes	L (μ H)	Tolerance	Test Condition	DCR (Ω) max.	IDC (A) max.		I rms (A) max.
					20°C	100°C	
1R2	1.2	N	100KHz, 0.1V	0.117	0.85	0.70	1.05
2R2	2.2	N	100KHz, 0.1V	0.182	0.70	0.60	0.90
3R3	3.3	N	100KHz, 0.1V	0.260	0.60	0.50	0.82
4R7	4.7	N	100KHz, 0.1V	0.312	0.50	0.40	0.72
5R6	5.6	N	100KHz, 0.1V	0.442	0.46	0.35	0.67
6R8	6.8	N	100KHz, 0.1V	0.520	0.43	0.30	0.62
8R2	8.2	N	100KHz, 0.1V	0.560	0.38	0.28	0.58
100	10	M	100KHz, 0.1V	0.780	0.33	0.25	0.55
220	22	M	100KHz, 0.1V	1.650	0.22	-	-

SCDB2D15 Type

Codes	L (μ H)	Tolerance	Test Condition	DCR (Ω) max.	IDC (A) max.		I rms (A) max.
					20°C	100°C	
2R2	2.2	N	100KHz, 0.1V	0.150	1.00	0.80	1.00
3R3	3.3	N	100KHz, 0.1V	0.234	0.90	0.70	0.90
4R7	4.7	N	100KHz, 0.1V	0.338	0.80	0.60	0.85
5R6	5.6	N	100KHz, 0.1V	0.364	0.70	0.55	0.80
6R8	6.8	N	100KHz, 0.1V	0.416	0.60	0.52	0.77
8R2	8.2	N	100KHz, 0.1V	0.572	0.55	0.48	0.72
100	10	M	100KHz, 0.1V	0.624	0.50	0.45	0.70
120	12	M	100KHz, 0.1V	0.702	0.45	0.40	0.65
150	15	M	100KHz, 0.1V	0.949	0.40	0.35	0.50
180	18	M	100KHz, 0.1V	1.090	0.35	0.30	0.40
220	22	M	100KHz, 0.1V	1.250	0.30	0.25	0.30
330	33	M	100KHz, 0.1V	2.200	0.25	-	0.25

SCDB2D18 Type

Codes	L (μ H)	Tolerance	Test Condition	DCR (Ω) max.	IDC (A) max.		I rms (A) max.
					20°C	100°C	
2R2	2.2	N	100KHz, 0.1V	0.117	1.10	0.90	1.10
3R3	3.3	N	100KHz, 0.1V	0.143	1.00	0.80	1.00
4R7	4.7	N	100KHz, 0.1V	0.221	0.80	0.70	0.90
5R6	5.6	N	100KHz, 0.1V	0.247	0.75	0.60	0.85
6R8	6.8	N	100KHz, 0.1V	0.312	0.70	0.55	0.82
8R2	8.2	N	100KHz, 0.1V	0.351	0.60	0.50	0.78
100	10	M	100KHz, 0.1V	0.468	0.55	0.48	0.75
120	12	M	100KHz, 0.1V	0.533	0.50	0.45	0.65
150	15	M	100KHz, 0.1V	0.598	0.45	0.40	0.55
180	18	M	100KHz, 0.1V	0.715	0.40	0.33	0.50
220	22	M	100KHz, 0.1V	0.975	0.38	0.30	0.45
270	27	M	100KHz, 0.1V	1.105	0.33	0.25	0.40
330	33	M	100KHz, 0.1V	1.222	0.30	0.23	0.33
390	39	M	100KHz, 0.1V	1.625	0.25	0.20	0.28
470	47	M	100KHz, 0.1V	1.820	0.23	0.18	0.25